


System Chart for MDX Housings (for Canon)

MDX-5D MarkIII, MDX-7D, MDX-PRO 5D MarkII, MDX-PRO MarkIII, MDX-40D

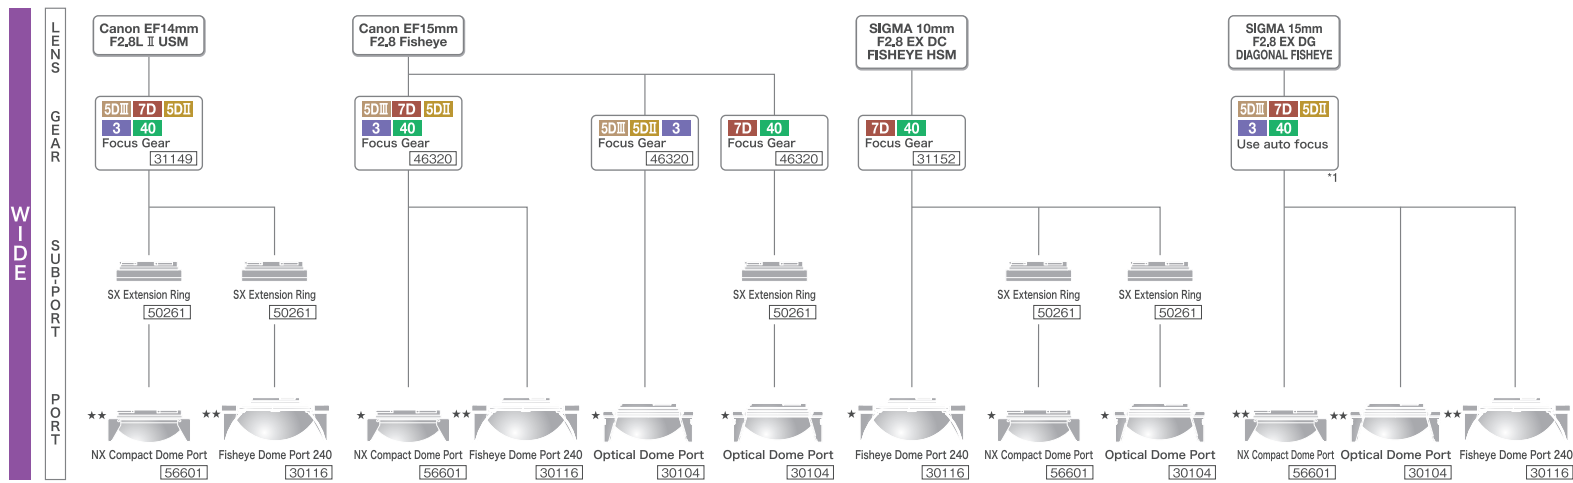

Housings with the following marks are compatible

5DIII MDX-5D MarkIII 7D MDX-7D 5DII MDX-PRO 5D MarkII 3 MDX-PRO MarkIII 40 MDX-40D

★★ : Image aberration is rarely apparent ★ : Image aberration is sometimes apparent
 ☆ : The Close-up Lens 125 can be attached to the port end. *The M67-M62 Step Down Ring is required when mounting the Close-up Lens 125.
 *1:Manual focus cannot be used. *2:Auto focus cannot be used. *3:It may be necessary to remove the dome shades at the widest picture angle so they do not appear in the images. ※1 Setting of the aperture value more than F8 is recommended.
 [Notice] Unnecessary reflection may be photographed under some conditions.
 [Notice] The system chart indicates the most recent information as of December 2012. Please refer to the current system chart on our website at the following address: <http://www.seaandsea.jp/>.