


System Chart for MDX Housings (for Nikon)

MDX-D800, MDX-D7000, MDX-D300s, MDX-D300, MDX-PRO D700, MDX-PRO D3

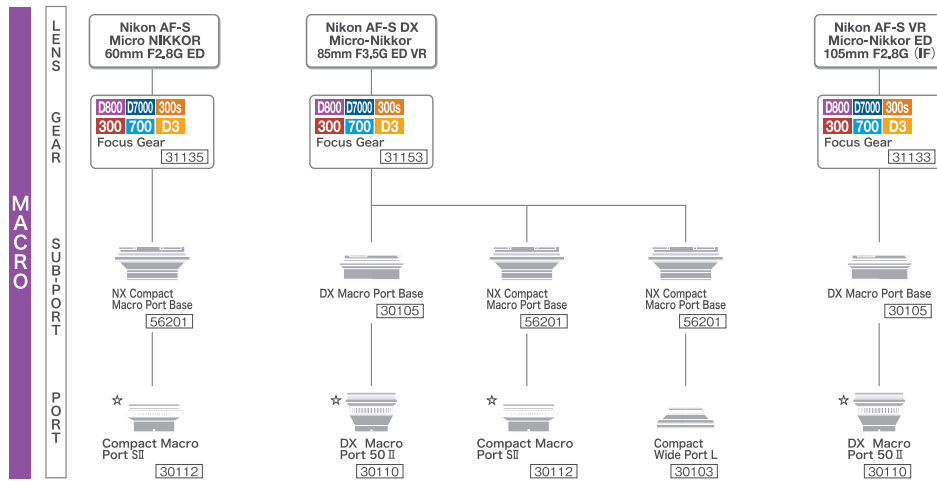

Housings with the following marks are compatible

**D800** MDX-D800   **D7000** MDX-D7000   **300s** MDX-D300s   **300** MDX-D300   **700** MDX-PRO D700   **D3** MDX-PRO D3

★★ : Image aberration is rarely apparent   ★ : Image aberration is sometimes apparent

☆ : The Close-up Lens 125 can be attached to the port end. \*The M67-M62 Step Down Ring is required when mounting the Close-up Lens 125.

\*1:Manual focus cannot be used. \*2:Auto focus cannot be used. \*3:It may be necessary to remove the dome shades at the widest picture angle so they do not appear in the images.

\*4:When mounting the Optical Dome Port on the MDX-D800 without any extension ring(s) remove the both shades by loosening the hex screws.

[Notice] Unnecessary reflection may be photographed under some conditions.

[Notice] The system chart indicates the most recent information as of December 2012. Please refer to the current system chart on our website at the following address: <http://www.seaandsea.jp/>.